



2025 CATALOG

SHENZHEN AURORA TECHNOLOGY LIMITED.

Leading Manufacturer in Automotive Lighting
Provide One-Stop Solutions & Service



Website: www.szaurora.com



Email: info@szaurora.com



Tel: +86 0755 82682990



Address: Aurora Building, HuaXia Yuan Industrial Park, Tongfu Road,
Pingdi, Longgang District, Shenzhen, Guangdong, China

AURORA Company Profile



Shenzhen Aurora Technology Limited

Professional manufacturer with IATF16949, ISO9001, ISO14001, ISO45001 certificates.
Founded in 2011, with 10,000 square meters industrial park, more than 400 employees.
Specialized in LED lighting products, like LED offroad lights, LED headlight bulbs, Marine LED lights, Industrial Lights, Mining Lights, Agriculture Lights, etc.



FACTORY VIDEO

We have strong R&D team and get below advantages

- 200 innovation patents until now.
- Products got IP68 & IP69K, Emark, SAE, CE, RoHS etc.
- Advanced equipments like CNC machines, SMT lines and X-ray for high efficiency and good quality control.
- Professional equipments to support tests like Darkroom Beam Test, Lumen, Aging test, High & low temperature, Vibration, and UV test. Ensure high and reliable quality.



IATF16949



ISO9001



ISO14001



ISO45001



National High-tech Enterprise

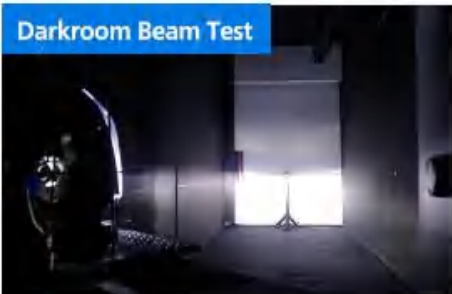
SMT Production Line



CNC Production Line



Darkroom Beam Test



Production Line



Waterproof Test



High & Low Temperature test




Lumen Test




Vibration Test





Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-S5D1-6-H		6"	30W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or add 6~8\$ get Standard wire harness 13. Amber Lens optional	66x31x31cm 14.6kg 21pcs per carton	Piece
★ALO-S5D1-10-H		10"	50W	Osram 5W	Combo		41x38x39cm 14.6kg 16 pcs per carton	Piece
★ALO-S5D1-20-H		20"	100W	Osram 5W	Combo		67x29x21cm 9.6kg 6pcs per carton	Piece
ALO-S5D1-26-H		26"	130W	Osram 5W	Combo			Piece
ALO-S5D1-28-H		28"	140W	Osram 5W	Combo			Piece
★ALO-S5D1-30-H		30"	150W	Osram 5W	Combo		93x20x21cm 8.3kg 4pcs per carton	Piece
★ALO-S5D1-40-H		40"	200W	Osram 5W	Combo		118x20x21cm 10.6kg 4pcs per carton	Piece
ALO-S5D1-46-H		46"	230W	Osram 5W	Combo			Piece
★ALO-S5D1-50-H		50"	250W	Osram 5W	Combo		144x20x21cm 12.9kg 4pcs per carton	Piece
ALO-S5D1-54-H		54"	270W	Osram 5W	Combo			Piece
ALO-T-S5D1-6-H		6"	30W	Osram 5W	Combo		66x31x31cm 14.6kg 21 pcs per carton	Piece
ALO-T-S5D1-10-H		10"	50W	Osram 5W	Combo		41x38x39cm 14.6kg 16 pcs per carton	Piece
ALO-T-S5D1-20-H		20"	100W	Osram 5W	Combo		67x29x21cm 9.6kg 6 pcs per carton	Piece
ALO-T-S5D1-30-H		30"	150W	Osram 5W	Combo		93x20x21cm 8.3kg 4 pcs per carton	Piece
ALO-T-S5D1-40-H		40"	200W	Osram 5W	Combo		118x20x21cm 10.6kg 4 pcs per carton	Piece
ALO-T-S5D1-50-H		50"	250W	Osram 5W	Combo		144x20x21cm 12.9kg 4 pcs per carton	Piece

ALO-S5D1-10-P7E13-H		10"	50W	Osram 5W	Scene + Combo	 <table><tr><th rowspan="2">Size</th><th rowspan="2">LEDs QTY</th><th colspan="5">Size(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th></tr><tr><td>6"</td><td>6</td><td>202</td><td>223.5</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>10"</td><td>10</td><td>303.6</td><td>325.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>20"</td><td>20</td><td>557.6</td><td>579.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>30"</td><td>30</td><td>811.6</td><td>833.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>40"</td><td>40</td><td>1065.6</td><td>1087.1</td><td>46</td><td>48.7</td><td>38.1</td></tr><tr><td>50"</td><td>50</td><td>1319.6</td><td>1338.1</td><td>46</td><td>48.7</td><td>38.1</td></tr></table>	Size	LEDs QTY	Size(mm)					A	B	C	D	E	6"	6	202	223.5	46	48.7	38.1	10"	10	303.6	325.1	46	48.7	38.1	20"	20	557.6	579.1	46	48.7	38.1	30"	30	811.6	833.1	46	48.7	38.1	40"	40	1065.6	1087.1	46	48.7	38.1	50"	50	1319.6	1338.1	46	48.7	38.1	41x38x39cm 14.6kg 16 pcs per carton	Piece
Size		LEDs QTY	Size(mm)																																																											
			A	B	C		D	E																																																						
6"		6	202	223.5	46		48.7	38.1																																																						
10"		10	303.6	325.1	46		48.7	38.1																																																						
20"	20	557.6	579.1	46	48.7	38.1																																																								
30"	30	811.6	833.1	46	48.7	38.1																																																								
40"	40	1065.6	1087.1	46	48.7	38.1																																																								
50"	50	1319.6	1338.1	46	48.7	38.1																																																								
ALO-S5D1-20-P7E13-H	20"	100W	Osram 5W	Scene + Combo	67x29x21cm 9.6kg 6 pcs per carton	Piece																																																								
ALO-S5D1-30-P7E13-H	30"	150W	Osram 5W	Scene + Combo	93x20x21cm 8.3kg 4 pcs per carton	Piece																																																								
ALO-S5D1-40-P7E13-H	40"	200W	Osram 5W	Scene + Combo	118x20x21cm 10.6kg 4 pcs per carton	Piece																																																								
ALO-S5D1-50-P7E13-H	50"	250W	Osram 5W	Scene + Combo	144x20x21cm 12.9kg 4 pcs per carton	Piece																																																								

Single Row Curved Light

ALO-C-S5D1-20-P7E7-H		20"	100W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or 6~8\$ get Standard wire harness	67x29x21cm 9.6kg 6 pcs per carton	Piece
ALO-C-S5D1-30-P7E7-H		30"	150W	Osram 5W	Combo		93x21x27cm 9.4kg 4 pcs per carton	Piece
ALO-C-S5D1-40-P7E7-H		40"	200W	Osram 5W	Combo		119x21x27cm 11kg 4 pcs per carton	Piece
ALO-C-S5D1-50-P7E7-H		50"	250W	Osram 5W	Combo		144x20x21cm 12.9kg 4 pcs per carton	Piece

Ice-Melting Single Row Light

ALO-S5D1-10RH-W		10"	50W	Osram 5W	Driving Beam	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. There are 2 Versions to choose: 1) Wiring & Switch control. Add 8.5~11.9\$ get wire 2) Wireless bluetooth and App control. Add 6~8\$ to get wiring and 10.3~16.4\$ for Bluetooth box. 13. Temperature sensor inside, with Ice-Melting Function	46x37x25cm 13.9kg 6 pcs per carton	Piece
ALO-S5D1-20RH-W		20"	100W	Osram 5W	Driving Beam		63x33x22cm 14.5kg 4 pcs per carton	Piece
ALO-S5D1-30RH-W		30"	150W	Osram 5W	Driving Beam		89x24x25cm 12.6kg 4 pcs per carton	Piece
ALO-S5D1-40RH-W		40"	200W	Osram 5W	Driving Beam		113x24x25 16.2kg 4 pcs per carton	Piece
ALO-S5D1-50RH-W		50"	250W	Osram 5W	Driving Beam		140x24x25cm 19.3kg 2 pcs per carton	Piece

RGB Light Series Single Row Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit																																															
ALO-S5D1-6-R5Q		6"	30W	Osram 5W & RGB	Driving Beam	1.LED Chips: Osram 5W& RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40℃~145℃ 10.Test and Certificate: CE, RoHS, UV, anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. There are 2 Versions to choose: 1) Wiring & Switch control. Add 8.5~11.9\$ get wire 2) Wireless bluetooth and App control. Add 6~8\$ to get wiring and 10.3~16.4\$ for Bluetooth box.	46x37x25cm 11.6kg 8 pcs per carton	Piece																																															
ALO-S5D1-10-R5Q		10"	50W	Osram 5W & RGB	Driving Beam		46x37x25cm 13.9kg 6 pcs per carton	Piece																																															
ALO-S5D1-20-R5Q		20"	100W	Osram 5W & RGB	Driving Beam		63x33x22cm 14.5kg 4 pcs per carton	Piece																																															
ALO-S5D1-30-R4R5Q		30"	150W	Osram 5W & RGB	Driving Beam		89x24x25cm 12.6kg 4 pcs per carton	Piece																																															
ALO-S5D1-40-R4R5Q		40"	200W	Osram 5W & RGB	Driving Beam		113x24x25 16.2kg 4 pcs per carton	Piece																																															
ALO-S5D1-50-R4R5Q		50"	250W	Osram 5W & RGB	Driving Beam		140x24x25cm 19.3kg 2 pcs per carton	Piece																																															
ALO-S6D1-6-R5Q		6"	30W	Osram 5W & RGB	Driving Beam	Dimension <table><tr><th rowspan="2">Size</th><th colspan="5">Size(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th></tr><tr><td>6"</td><td>201.8</td><td>222.3</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>10"</td><td>303.4</td><td>323.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>20"</td><td>557.4</td><td>577.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>30"</td><td>811.4</td><td>831.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>40"</td><td>1065.4</td><td>1085.9</td><td>35.2</td><td>67.4</td><td>32</td></tr><tr><td>50"</td><td>1319.4</td><td>1339.9</td><td>35.2</td><td>67.4</td><td>32</td></tr></table>	Size	Size(mm)					A	B	C	D	E	6"	201.8	222.3	35.2	67.4	32	10"	303.4	323.9	35.2	67.4	32	20"	557.4	577.9	35.2	67.4	32	30"	811.4	831.9	35.2	67.4	32	40"	1065.4	1085.9	35.2	67.4	32	50"	1319.4	1339.9	35.2	67.4	32	46x37x25cm 11.6kg 8 pcs per carton	Piece
Size		Size(mm)																																																					
		A	B	C	D		E																																																
6"		201.8	222.3	35.2	67.4		32																																																
10"		303.4	323.9	35.2	67.4		32																																																
20"		557.4	577.9	35.2	67.4		32																																																
30"	811.4	831.9	35.2	67.4	32																																																		
40"	1065.4	1085.9	35.2	67.4	32																																																		
50"	1319.4	1339.9	35.2	67.4	32																																																		
★ALO-S6D1-10-R5Q	10"	50W	Osram 5W & RGB	Driving Beam	46x37x25cm 13.9kg 6 pcs per carton	Piece																																																	
★ALO-S6D1-20-R5Q	20"	100W	Osram 5W & RGB	Driving Beam	63x33x22cm 14.5kg 4 pcs per carton	Piece																																																	
★ALO-S6D1-30-R4R5Q	30"	150W	Osram 5W & RGB	Driving Beam	89x24x25cm 12.6kg 4 pcs per carton	Piece																																																	
★ALO-S6D1-40-R4R5Q	40"	200W	Osram 5W & RGB	Driving Beam	113x24x25 16.2kg 4 pcs per carton	Piece																																																	
★ALO-S6D1-50-R4R5Q	50"	250W	Osram 5W & RGB	Driving Beam	140x24x25cm 19.3kg 2 pcs per carton	Piece																																																	
ALO-S5D1-10-C1Q-APP		10"	50W	Osram 5W & RGB	Combo	1.LED Chips: Osram 5W& RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40℃~145℃ 10.Test and Certificate: CE, RoHS, UV, anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Bluetooth box: Add \$10.3~16.4\$		Piece																																															
ALO-S5D1-20-C1Q-APP		20"	100W	Osram 5W & RGB	Combo			Piece																																															
ALO-S5D1-30-C1Q-APP		30"	150W	Osram 5W & RGB	Combo			Piece																																															
ALO-S5D1-40-C1Q-APP		40"	200W	Osram 5W & RGB	Combo			Piece																																															
ALO-S5D1-50-C1Q-APP		50"	250W	Osram 5W & RGB	Combo			Piece																																															

(White + Golden Yellow) Dual-Color Single Row Light




Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-S6-6-R5H1	  	6"	90W	3570	Combo	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 2-4\$ get small DT connector or 8.9-11.2\$ get Standard wire harness	46x37x25cm 11.6kg 8 pcs per carton	Piece
ALO-S6-10-R5H1		10"	150W	3570	Combo		46x37x25cm 13.9kg 6 pcs per carton	Piece
ALO-S6-20-R5H1		20"	300W	3570	Combo		63x33x22cm 14.5kg 4 pcs per carton	Piece
ALO-S6-30-R4R5H1		30"	450W	3570	Combo		89x24x25cm 12.6kg 4 pcs per carton	Piece
ALO-S6-40-R4R5H1		40"	600W	3570	Combo		113x24x25 16.2kg 4 pcs per carton	Piece
ALO-S6-50-R4R5H1		50"	750W	3570	Combo		140x24x25cm 19.3kg 2 pcs per carton	Piece

Dimension




Size	Size(mm)				
	A	B	C	D	E
6"	201.8	222.3	35.2	67.4	32
10"	302.4	323.9	35.2	67.4	32
20"	557.4	577.9	35.2	67.4	32
30"	811.4	831.9	35.2	67.4	32
40"	1065.4	1085.9	35.2	67.4	32
50"	1319.4	1339.9	35.2	67.4	32

(White + Golden Yellow) Dual-Color Single Row Light with DRL

ALO-S6-10-R5H1-W	  	10"	150W	3570	Combo + White DRL	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 2-4\$ get small DT connector or 8.9-11.2\$ get Standard wire harness 13. Amber DRL is optional	46x37x25cm 13.9kg 6 pcs per carton	Piece
ALO-S6-20-R5H1-W		20"	300W	3570	Combo + White DRL		63x33x22cm 14.5kg 4 pcs per carton	Piece
ALO-S6-30-R4R5H1-W		30"	450W	3570	Combo + White DRL		89x24x25cm 12.6kg 4 pcs per carton	Piece
ALO-S6-40-R4R5H1-W		40"	600W	3570	Combo + White DRL		113x24x25 16.2kg 4 pcs per carton	Piece
ALO-S6-50-R4R5H1-W		50"	750W	3570	Combo + White DRL		140x24x25cm 19.3kg 2 pcs per carton	Piece

Single Row Light with White/Amber Backlights



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-P-S10-10-R13Y-AW		10"	75W	1860 & 2835	Combo + white/amber backlits	1.LED Chips: 1860 & 2835 2. Input Voltage : DC12-24V 3.Color Temperature: 6200K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Die-cast aluminum 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan: 50,000 hours+ 12. Add 2~4\$ get small DT connector or 12\$ get Standard wire harness		Piece
★ ALO-P-S10-20-R13Y-AW		20"	150W	1860 & 2835	Combo + white/amber backlits			Piece
★ ALO-P-S10-30-R13Y-AW		30"	225W	1860 & 2835	Combo + white/amber backlits			Piece
★ ALO-P-S10-40-R13Y-AW		40"	300W	1860 & 2835	Combo + white/amber backlits			Piece
★ ALO-P-S10-50-R13Y-AW		50"	375W	1860 & 2835	Combo + white/amber backlits			Piece

Screwless Signal Warning Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-S5D1-N24		24"	60W	Osram 5W	Scene	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Beam Pattern: Scene 4.Waterproof Rate: IP68 & IP69K 5. Housing Material: Aluminum 6063 6. Bracket: Anti-Rust Iron 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 9. Average Lifespan: 50,000 hours+		Piece
ALO-S5D1-N30		30"	75W	Osram 5W	Scene	93x20x21cm 8.3kg 4 pcs per carton	Piece	
ALO-S5D1-N40		40"	100W	Osram 5W	Scene	118x20x21cm 10.6kg 4 pcs per carton	Piece	

Screwless Single Row Light with Lens Optics

ALO-S5-5.5-L3D1		5.5"	30W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or add 6~8\$ get Standard wire harness	66x31x31cm 14.6kg 21 pcs per carton	Piece
ALO-S5-11-L3D1		11"	50W	Osram 5W	Combo		41x38x39cm 14.6kg 16 pcs per carton	Piece
ALO-S5-22-L3D1		22"	100W	Osram 5W	Combo		67x29x21cm 9.6kg 6 pcs per carton	Piece
ALO-S5-33-L3D1		33"	150W	Osram 5W	Combo		93x20x21cm 8.3kg 4 pcs per carton	Piece
ALO-S5-44-L3D1		44"	200W	Osram 5W	Combo		118x20x21cm 10.6kg 4 pcs per carton	Piece
ALO-S5-55-L3D1		55"	250W	Osram 5W	Combo		144x20x21cm 12.9kg 4 pcs per carton	Piece

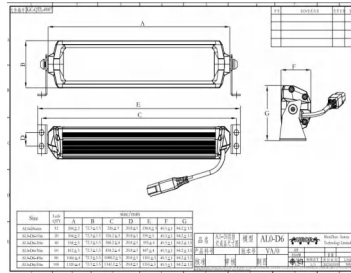
Heavy Duty Series Single Row Light

ALO-S1-6-D1D1		6"	45W	Osram 5W	Driving Beam	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam /Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE,RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact,etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or 6~8\$ get 	54.5x29x29.5cm 9.1kg 8 pcs per carton	Piece
ALO-S1-10-D1D1		10"	75W	Osram 5W	Driving Beam		54.5x39x29.5cm 12.6kg 8 pcs per carton	Piece
ALO-S1-6-P7E7D1		6"	30W	Osram 5W	Combo		54.5x29x29.5cm 9.1kg 8 pcs per carton	Piece
ALO-S1-10-P7E7D1		10"	50W	Osram 5W	Combo		54.5x39x29.5cm 12.6kg 8 pcs per carton	Piece
ALO-S1-20-P7E7D1		20"	100W	Osram 5W	Combo		65x29x30.5cm 10.9kg 4 pcs per carton	Piece
ALO-S1-30-P7E7D1		30"	150W	Osram 5W	Combo		90.5x29x30.5cm 16.6kg 4 pcs per carton	Piece
ALO-S1-40-P7E7D1		40"	200W	Osram 5W	Combo		115x29x30.5cm 19.5kg 4 pcs per carton	Piece
ALO-S1-50-P7E7D1		50"	250W	Osram 5W	Combo		141x29x16.5cm 13kg 2 pcs per carton	Piece

Patented Screwless Series Dual Row Light





Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-D6D1-6		6"	60W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or 6~8\$ get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
★ ALO-D6D1-10		10"	100W	Osram 5W	Combo		36.5x35x23cm 19kg 10 pcs per carton	Piece
★ ALO-D6D1-20		20"	200W	Osram 5W	Combo		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D6D1-26		26"	260W	Osram 5W	Combo			Piece
ALO-D6D1-28		28"	280W	Osram 5W	Combo			Piece
★ ALO-D6D1-30		30"	300W	Osram 5W	Combo		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D6D1-38		38"	380W	Osram 5W	Combo			Piece
ALO-D6D1-40		40"	400W	Osram 5W	Combo		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D6D1-46		46"	460W	Osram 5W	Combo			Piece
★ ALO-D6D1-50		50"	500W	Osram 5W	Combo		139x24x25cm 18kg 4 pcs per carton	Piece
ALO-D6D1-54		54"	540W	Osram 5W	Combo			Piece




Patented Screwless Series Dual Row Golden Yellow Light

ALO-T-D6D1-6		6"	60W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or 6~8\$ get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
ALO-T-D6D1-10		10"	100W	Osram 5W	Combo		36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-T-D6D1-20		20"	200W	Osram 5W	Combo		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-T-D6D1-30		30"	300W	Osram 5W	Combo		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-T-D6D1-40		40"	400W	Osram 5W	Combo		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-T-D6D1-50		50"	500W	Osram 5W	Combo		139x24x25cm 18kg 4 pcs per carton	Piece

Heavy Duty Series Dual Row Light

ALO-6-P4E4D1		6"	60W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add 1-2\$ get small DT connector or 6-8\$ get Standard wire harness	54.5x29x30cm 12.2kg 8 pcs per carton	Piece
ALO-10-P4E4D1		10"	100W	Osram 5W	Combo		54.5x39x30cm 18.3kg 8 pcs per carton	Piece
ALO-20-P4E4D1		20"	200W	Osram 5W	Combo		65x29x30.5cm 13.5kg 4 pcs per carton	Piece
ALO-30-P4E4D1		30"	300W	Osram 5W	Combo		90.5x29x30.5cm 20kg 4 pcs per carton	Piece
ALO-40-P4E4D1		40"	400W	Osram 5W	Combo		115x29x30.5cm 24.4kg 4 pcs per carton	Piece
ALO-50-P4E4D1		50"	500W	Osram 5W	Combo		141x29x16.5cm 15.2kg 4 pcs per carton	Piece
								
ALO-D1-6-P4E4T		6"	120W	Osram 10W	Combo	1.LED Chips: Osram 10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless Steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1-2\$ get small DT connector or 6-8\$ get Standard wire harness	54.5x29x30cm 12.2kg 8 pcs per carton	Piece
ALO-D1-10-P4E4T		10"	200W	Osram 10W	Combo		54.5x39x30cm 18.3kg 8 pcs per carton	Piece
ALO-D1-20-P4E4T		20"	400W	Osram 10W	Combo		65x29x30.5cm 13.5kg 4 pcs per carton	Piece
ALO-D1-30-P4E4T		30"	600W	Osram 10W	Combo		90.5x29x30.5cm 20kg 4 pcs per carton	Piece
ALO-D1-40-P4E4T		40"	800W	Osram 10W	Combo		115x29x30.5cm 24.4kg 4 pcs per carton	Piece
ALO-D1-50-P4E4T		50"	1000W	Osram 10W	Combo		141x29x16.5cm 15.2kg 4 pcs per carton	Piece
								

Dual Row Curved Light


ALO-C-D6D1-20		20"	200W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or 6~8\$ get Standard wire harness  <table border="1" data-bbox="936 2067 1214 2181"><thead><tr><th rowspan="2">Size</th><th rowspan="2">LED</th><th colspan="4">Size(mm)</th></tr><tr><th>L</th><th>D</th><th>H1</th><th>H2</th></tr></thead><tbody><tr><td>20"</td><td>40</td><td>562.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>30"</td><td>60</td><td>818.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>40"</td><td>80</td><td>1074.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr><tr><td>50"</td><td>100</td><td>1330.2±3</td><td>50</td><td>75.8</td><td>48.1</td></tr></tbody></table>	Size	LED	Size(mm)				L	D	H1	H2	20"	40	562.2±3	50	75.8	48.1	30"	60	818.2±3	50	75.8	48.1	40"	80	1074.2±3	50	75.8	48.1	50"	100	1330.2±3	50	75.8	48.1	62x29x30cm 14kg 6 pcs per carton	Piece
Size		LED	Size(mm)																																							
			L	D	H1		H2																																			
20"		40	562.2±3	50	75.8		48.1																																			
30"	60	818.2±3	50	75.8	48.1																																					
40"	80	1074.2±3	50	75.8	48.1																																					
50"	100	1330.2±3	50	75.8	48.1																																					
ALO-C-D6D1-30	30"	300W	Osram 5W	Combo	91x29x31cm 14.8kg 4 pcs per carton	Piece																																				
ALO-C-D6D1-40	40"	400W	Osram 5W	Combo	116x30x31cm 17.5kg 4 pcs per carton	Piece																																				
ALO-C-D6D1-50	50"	500W	Osram 5W	Combo	141x29x17cm 11kg 4 pcs per carton	Piece																																				

Scene Light Series Ultra Flood Dual Row Light


ALO-D6-10-E24D1		10"	100W	Osram 5W	Scene 120°	1.LED Chips: Osram 5W 2.Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Scene 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1\$ get small DT connector or 6\$ get Standard wire harness	36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D6-20-E24D1		20"	200W	Osram 5W	Scene 120°		63x35x26cm 11.8kg 6 pcs per carton	Piece

(White + Golden Yellow) Dual-Color Dual Row Light




Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-D6-6-P23H1	   	6"	45W	3570	Spot	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000k 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add 2~4\$ get small DT connector or 8.9~11.2\$ get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
ALO-D6-10-P23H1		10"	75W	3570	Spot		36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D6-20-P23H1		20"	150W	3570	Spot		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D6-30-P23H1		30"	225W	3570	Spot		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D6-40-P23H1		40"	300W	3570	Spot		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D6-50-P23H1		50"	375W	3570	Spot		139x24x25cm 18kg 4 pcs per carton	Piece

(White + Golden Yellow) Dual-Color Dual Row Light with DRL

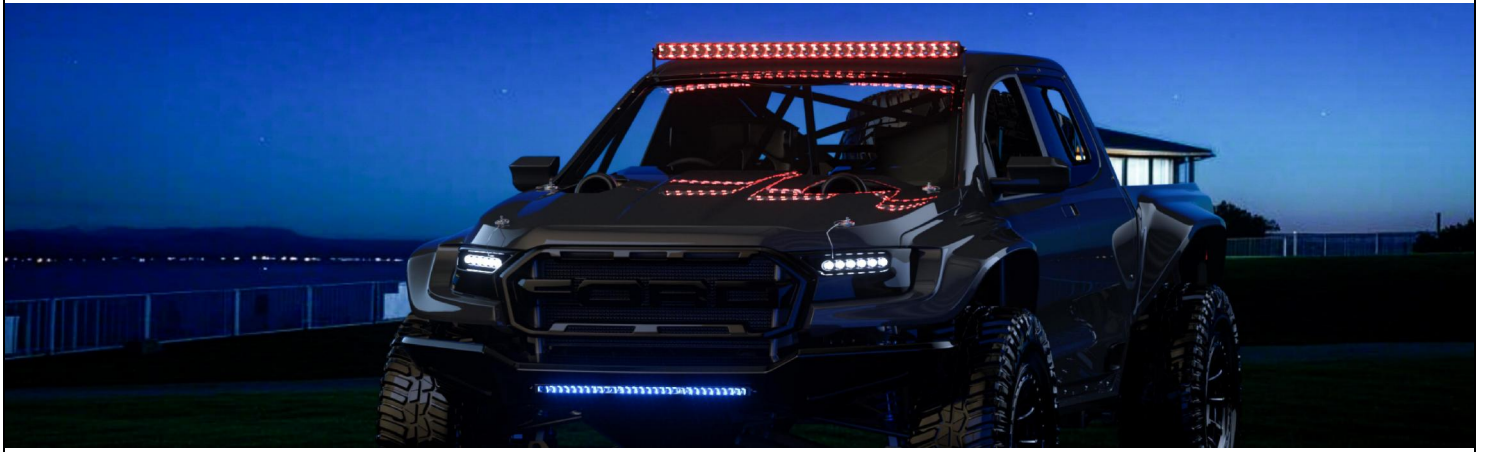
ALO-D6-10-P23H1-W	  	10"	75W	3570	Spot + White DRL	1.LED Chips: 3570 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K,3000k 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS,UV,anti-vibration, anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan: 50,000 hours+ 12.Add 2~4\$ get small DT connector or 8.9~11.2\$ get Standard wire harness 13. Amber DRL is optional	36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D6-20-P23H1-W		20"	150W	3570	Spot + White DRL		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D6-30-P23H1-W		30"	225W	3570	Spot + White DRL		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D6-40-P23H1-W		40"	300W	3570	Spot + White DRL		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D6-50-P23H1-W		50"	375W	3570	Spot + White DRL		139x24x25cm 18kg 4 pcs per carton	Piece

Dual Row Light with White/Amber Backlights



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-P-D10-10-R14Y-AW		10"	150W	1860 & 2835	Combo + white/amber backlits	1.LED Chips: 1860 & 2835 2. Input Voltage : DC12-24V 3.Color Temperature: 6200K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Die-cast aluminum 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 2~4\$ get small DT connector or 12\$ get Standard wire harness		Piece
★ALO-P-D10-20-R14Y-AW		20"	300W	1860 & 2835	Combo + white/amber backlits			Piece
★ALO-P-D10-30-R14Y-AW		30"	450W	1860 & 2835	Combo + white/amber backlits			Piece
★ALO-P-D10-40-R14Y-AW		40"	600W	1860 & 2835	Combo + white/amber backlits			Piece
★ALO-P-D10-50-R14Y-AW		50"	750W	1860 & 2835	Combo + white/amber backlits			Piece

RGB Light Series Dual Row Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-D6T-6-P23Q		6"	45W	Trinity White & RGB	Spot	1.LED Chips: Trinity White & RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. There are 2 Versions to choose: 1) Wiring & Switch control. Add 8.5~11.9\$ get wire 2) Wireless bluetooth and App control. Add 6~8\$ to get wiring and 10.3~16.4\$ for Bluetooth box.	56x37x32cm 15.9kg 10 pcs per carton	Piece
★ALO-D6T-10-P23Q		10"	75W	Trinity White & RGB	Spot		56x37x32cm 17.5kg 10 pcs per carton	Piece
★ALO-D6T-20-P23Q		20"	150W	Trinity White & RGB	Spot		63x35x26cm 15.2kg 6 pcs per carton	Piece
★ALO-D6T-30-P23Q		30"	225W	Trinity White & RGB	Spot		89x24x25cm 13kg 4 pcs per carton	Piece
★ALO-D6T-40-P23Q		40"	300W	Trinity White & RGB	Spot		113x24x25cm 17kg 4 pcs per carton	Piece
★ALO-D6T-50-P23Q		50"	375W	Trinity White & RGB	Spot		140x24x25cm 20.4kg 4 pcs per carton	Piece

Screwless Dual Row Light with Lens Optics

ALO-D6-6-L1L2D1		6"	60W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or 6~8\$ get Standard wire harness	46x37x26cm 17kg 10 pcs per carton	Piece
ALO-D6-10-L1L2D1		10"	100W	Osram 5W	Combo		36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D6-20-L1L2D1		20"	200W	Osram 5W	Combo		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D6-30-L1L2D1		30"	300W	Osram 5W	Combo		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D6-40-L1L2D1		40"	400W	Osram 5W	Combo		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D6-50-L1L2D1		50"	500W	Osram 5W	Combo		139x24x25cm 18kg 4 pcs per carton	Piece

RGB Dual Row Light In-direct Reflector



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-D8-10-R5Y1-Q		10"	100W	1860 & RGB	Driving Beam	1.LED Chips: Osram 5W & RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE,RoHS,UV,anti-vibration, anti-interference,salt spray,high and low temperature, falling ball impact,etc. 11. Average Lifespan: 50,000 hours+ 12. Wiring & Switch control. Add 8.5~11.9\$ get wire	36.5x35x23cm 19kg 10 pcs per carton	Piece
ALO-D8-20-R5Y1-Q		20"	200W	1860 & RGB	Driving Beam		63x35x26cm 11.8kg 6 pcs per carton	Piece
ALO-D8-30-R5Y1-Q		30"	300W	1860 & RGB	Driving Beam		89x24x25cm 11.4kg 4 pcs per carton	Piece
ALO-D8-40-R5Y1-Q		40"	400W	1860 & RGB	Driving Beam		114x24x25cm 15kg 4 pcs per carton	Piece
ALO-D8-50-R5Y1-Q		50"	500W	1860 & RGB	Driving Beam		139x24x25cm 18kg 4 pcs per carton	Piece

RGB Light Series Evolve Light Bar



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-N-10		10"	124W	Osram 5&10W	High/Low beam, Flood beam, Spot beam, Scene beam, RGB	1.LED Chips: Osram 5W & 10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K & RGB 4.Connector Type: Waterproof DT Connector 5. Housing Material: Aluminum 6063 6. Bracket: Stainless Steel 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Price include wire harness, bracket, control panel	43x35x46cm 14.8kg 4 pcs per carton	Piece
★ ALO-N-20		20"	248W	Osram 5&10W			67x38x39cm 21.3kg 4 pcs per carton	Piece
★ ALO-N-30		30"	372W	Osram 5&10W		Evolve Light Series Dimensions      	93x38x39cm 29.3kg 4 pcs per carton	Piece
★ ALO-N-40		40"	496W	Osram 5&10W			118x37x20cm 20kg 2 pcs per carton	Piece
★ ALO-N-50		50"	620W	Osram 5&10W			145x38x22cm 24kg 2 pcs per carton	Piece

Emark R149 Approved LED Lights

★ ALO-S5D1-20-H-R149		20"	100W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1\$ get small DT connector or 6\$ get Standard wire harness	67x29x21cm 9.6kg 6 pcs per carton	Piece
★ ALO-D6D1-20-R149		20"	200W	Osram 5W	Combo		63x35x26cm 11.8kg 6 pcs per carton	Piece

Emark R112 Approved LED Lights



ALO-S1-10-P7B-E3		10"	30W	Osram 3W	Spot	1.LED Chips: Osram 3W/5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 9. Average Lifespan: 50,000 hours+ 10. Add 1\$ get small DT connector or 6\$ get Standard wire harness	54.5x39x29.5cm 12.6kg 8 pcs per carton	Piece
ALO-S1-20-P7B-E3		20"	60W	Osram 3W	Spot		65x29x30.5cm 10.9kg 4 pcs per carton	Piece
ALO-10-P4E4D-E3		10"	100W	Osram 5W	Combo		54.5x39x30cm 18.3kg 8 pcs per carton	Piece
ALO-20-P4E4D-E3		20"	200W	Osram 5W	Combo		65x29x30.5cm 13.5kg 4 pcs per carton	Piece






SAE Approved LED Lights

★ ALO-D6D1-20-S		20"	200W	Osram 5W	Combo	1.LED Chips: 5W / 3W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 9. Average Lifespan: 50,000 hours+ 10. Add 1\$ get small DT connector or 6\$ get Standard wire harness	63x35x26cm 11.8kg 6pcs per carton	Piece
ALO-S1-20-E7D-S		20"	100W	Osram 5W	Flood		65x29x30.5cm 10.9kg 4 pcs per carton	Piece
ALO-20-P4E4K-S		20"	120W	Cree 3W	Combo		65x29x30.5cm 13.5kg 4 pcs per carton	Piece
ALO-L-6-P7E7B-S		7*5"	60W	Osram 3W	Combo		47x30x32 9.65KG 4 pcs per carton	Piece

W Series LED Work Light









Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-2-P4T		3*3"	40W	Osram 10W	Spot	1.LED Chips: Osram 5W /10W 2.Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Anti-Rust Iron 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11.Add 1\$ get small DT connector or Standard wire harness option: For control 1 light: add \$5 For control 2 lights: add \$8 12. Golden lens and Amber lens is optional	69x30x16cm 11.3kg 10 pcs per carton	Piece
★ALO-2-E4T		3*3"	40W	Osram 10W	Flood		69x30x16cm 11.3kg 10 pcs per carton	Piece
★ALO-K-2-E4T		3*3"	40W	Osram 10W	Diffusion		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-EK-2-E4T		3.6*2.7"	40W	Osram 10W	Diffusion		62x32x32cm 17.3kg 16 pcs per carton	Piece
ALO-2-D1D1		3*3"	30W	Osram 5W	Driving Beam		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-P4D1		3*3"	20W	Osram 5W	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E4D1		3*3"	20W	Osram 5W	Flood		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-T-2-P4D1 (Yellow Lens)		3*3"	20W	Osram 5W	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece

ALO-A-2-P4D1 (Amber Lens)		3*3"	20W	Osram 5W	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-E-2-E4D1		3.6*2.7"	20W	Osram 5W	Flood		62x32x32cm 17.3kg 16 pcs per carton	Piece
★ ALO-2-P4E15D1		3*4"	40W	Osram 5W	Spot + Side Shooter		69x30x16cm 9.84kg 10 pcs per carton	Piece
★ ALO-2-E4E15D1		3*4"	40W	Osram 5W	Flood + Side Shooter			
ALO-2-P4A		3*3"	12W	CREE 3W amber	Spot		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E4A		3*3"	12W	CREE 3W amber	Flood			
★ ALO-D3-P4D1		3*3"	20W	Osram 5W	Spot		62x33x31cm 12.5KG 16 pcs per carton	Piece
★ ALO-D3-E4D1		3*3"	20W	Osram 5W	Flood			
★ ALO-D3-E4T		3*3"	40W	Osram 10W	Flood			
★ ALO-D3-P4T		3*3"	40W	Osram 10W	Spot			
ALO-D3-E4A		3*3"	12W	CREE 3W amber	Flood			
ALO-2-E12T		3*3"	40W	Osram 10W	Scene 120°		69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E12KR		3*3"	12W	3W White & Red LED	Scene 120°			Piece
ALO-2-E12KA		3*3"	12W	3W White & Amber LED	Scene 120°			Piece
Infrared LED Work Light								
ALO-2-P4F-940		3*3"	12W	940nm Infrared led	Spot	1.LED Chips: 940nm Infrared led 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot/Flood 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE,RoHS,UV,anti-vibration,anti-interference,salt spray,high and low temperature,falling ball impact etc. 11. Average Lifespan: 50,000 hours+ 12.850nm Infrared LED is optional 13.Add 1\$ get small DT connector or add 5- 8\$ get Standard wire harness 14.850nm Infrared LED chip is optional if need	69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-2-E4F-940		3*3"	12W	940nm Infrared led	Flood			

Small Working Light




Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-L-2-P7T		3*1.5"	20W	Osram 10W	Spot	1.LED Chips: Osram LED 5W /10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Stainless Steel 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11.Add 1\$ get small DT connector or 5\$ get Standard wire harness	59x40x35 17.7KG 45 pcs per carton	Piece
ALO-L-2-E7T		3*1.5"	20W	Osram 10W	Flood			
ALO-L-2-E7D1		3*1.5"	10W	Osram 5W	Flood			
★ALO-L-K-2-E7T		3*1.5"	20W	Osram 10W	Diffusion		59x40x35 17.7KG 45 pcs per carton	Piece
★ALO-E-L-K-2-E7T		3*1.5"	20W	Osram 10W	Diffusion			
★ALO-E-L-2-P7T		3*1.5"	20W	Osram 10W	Spot			
★ALO-E-L-2-E7T		3*1.5"	20W	Osram 10W	Flood		59x40x35 17.7KG 45 pcs per carton	Piece
ALO-L-2-E13T		3*1.5"	20W	10W	Scene		59x40x35 17.7Kg 45 pcs per carton	Piece
ALO-E-L-2-E13T		3*1.5"	20W	10W	Scene		59x40x35 17.7Kg 45 pcs per carton	Piece

ALO-L-4-E7D1		5*2"	20W	Osram 5W	Flood		53x53x35 20.2KG 36 pcs per carton	Piece
ALO-L-4-E13T		5*2"	40W	10W	Scene		53x53x35 20.2KG 36 pcs per carton	Piece
ALO-E-L-4-E13T		5*2"	40W	10W	Scene		53x53x35 20.2KG 36 pcs per carton	Piece
★ ALO-L-4.8-E31D1		4.8"*2.4"	15W	Osram 5W	Scene			Piece
★ ALO-W-4-C26T3		5*5"	90W	Osram 10W	Combo	1.LED Chips: Osram 10W 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination/Diffusion 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add 1 \$ get small DT connector or \$5 get Standard wire harness ; For control 2 lights: add \$8	33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-W-4-C27T3		5*5"	120W	Osram 10W	Combo		33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-K-W-4-C26T3		5*5"	90W	Osram 10W	Diffusion		33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-K-W-4-C27T3		5*5"	120W	Osram 10W	Diffusion		33*30*31cm 13.4KG 8 pcs per carton	Piece
★ ALO-L-6-P7E7D1		7*5"	100W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add 1\$ get small DT connector or \$6 get Standard wire harness ; For control 2 lights: add \$9.1	47x30x32 9.65KG 4 pcs per carton	Piece

ALO-W1-2-P4T		3*3"	40W	Osram 10W	Spot	1.LED Chips: Osram 10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot / Flood 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless Steel 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1\$ get small DT connector or Standard wire harness option: For control 1 light: add \$5; For control 2 lights: add \$8	69x31x17cm 11.5kg 10 pcs per carton	Piece
ALO-W1-2-E4T		3*3"	40W	Osram 10W	Flood		69x31x17cm 11.5kg 10 pcs per carton	Piece

LED Working Light with Lens Optics

ALO-2-L1D1		3*3"	20W	Osram 5W	Spot+Lens	1.LED Chips: Osram 5W/10W 2.Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Bracket: Anti-Rust Iron 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11.Add 1\$ get small DT connector or standard wire harness option: For control 1 light add \$5; For control 2 lights add \$8	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-2-L2D1		3*3"	20W	Osram 5W	Flood+Lens		69x30x16 11.3kg 10 pcs per carton	Piece
★ ALO-2-L22T3		3*3"	40W	Osram 10W	Lens		69x30x16 11.3kg 10 pcs per carton	Piece

NEW Dual-Color Work Light (White+Golden Yellow)



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-2-P23H1		3*3"	30W	3570	Spot	1.LED Chips: 3570 2.Voltage : 9V-36V 3.Color Temperature: 6500K, 3000K 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add 2\$ get small DT connector or Standard Wire harness option: For control 1 light add \$6.9 ; For control 2 lights add \$10.1	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-D3-2-P23H1		3*3"	30W	3570	Spot		55x35x29 16KG 20 pcs per carton	Piece

RGB Working Lights






Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ ALO-D3T-2-P23Q		3*3"	30W	3570 & RGB	Spot	1.LED Chips: 3570 & RGB 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+	55x35x29 12.1KG 12 pcs per carton	Piece
ALO-2-T-P23Q		3*3"	30W	3570 & RGB	Spot	11. There are 2 Versions to choose: 1) Wiring & Switch control. For control 1 light: add \$8.5; For control 2 lights: add \$13.9 2) Wireless bluetooth and App control. Add 6~8\$ to get wiring and 10.3~16.4\$ for Bluetooth box.	55x35x29 16KG 12 pcs per carton	Piece

LED Work Light In-direct Reflector




Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-2-R9D1-W-A		3*3"	20W	Osram 5W	White beam + White DRL	1.LED Chips: Osram 5W/10W 2.Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Driving Beam 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. Working Temperature: -40°C~145°C 10. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12.Add 2\$ get small DT connector or Standard wire harness option: For control 2 lights: add \$10.1	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-2-R9D1-A-A		3*3"	20W	Osram 5W	White beam + Amber DRL		69x30x16 11.3kg 10 pcs per carton	Piece
ALO-T-2-R9D1-W-A		3*3"	20W	Osram 5W	Golden Yellow beam + White DRL		69x30x16 11.3kg 10 pcs per carton	Piece
ALO-T-2-R9D1-A-A		3*3"	20W	Osram 5W	Golden Yellow beam + Amber DRL		69x30x16 11.3kg 10 pcs per carton	Piece

ALO-2-R9T3-W-A		3*3"	40W	Osram 10W	White beam + White DRL	 	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-2-R9T3-A-A		3*3"	40W	Osram 10W	White beam + Amber DRL		69x30x16 11.3kg 10 pcs per carton	Piece
ALO-T-2-R9T3-W-A		3*3"	40W	Osram 10W	Golden Yellow beam + White DRL	 	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-T-2-R9T3-A-A		3*3"	40W	Osram 10W	Golden Yellow beam + Amber DRL		69x30x16 11.3kg 10 pcs per carton	Piece
ALO-2-R9T3-AW-A	 	3*3"	40W	Osram 10W	White beam + Amber/ White DRL	 	69x30x16 11.3kg 10 pcs per carton	Piece
ALO-T-2-R9T3-AW-A	 	3*3"	40W	Osram 10W	Golden Yellow beam + White/Ambe r DRL		69x30x16 11.3kg 10 pcs per carton	Piece

Rear View Mirror light for UTV





Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-W-4.5-E4D1		5.9"*2.3"	20W	Osram 5W	Flood	1.LED Chips: Osram 5W/10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot / Flood 5.Waterproof Rate: IP68 & IP69K 6. Housing Material: Aluminum 6063 7. Working Temperature: -40°C~145°C 8. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1\$ get small DT connector or Standard wire harness For control 2 lights: add \$9.2	69x30x16cm 11.3kg 10 pcs per carton	Piece
ALO-W-4.5-P4D1		5.9"*2.3"	20W	Osram 5W	Spot			Piece
ALO-W-4.5-E4T3		5.9"*2.3"	40W	Osram 10W	Flood			Piece
ALO-W-4.5-P4T3		5.9"*2.3"	40W	Osram 10W	Spot			Piece




Industrial & Agricultural Work Lights




Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-W-3.3-L9D1		3.3"	15W	3W	Flood	Rated voltage: DC 12V / DC 24V Working voltage range: DC 9-30V Luminous flux: ≥1100 lm Beam Pattern: Flood Protection class: IP67 Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:83*83mm Thickness:37mm Weight:145g 	/	Piece
★ALO-W-4.2-L6D1-16		4.2"	48W	3W	65° Flood	Rated voltage: 12V / 24V Working voltage range: 10-30V DC Luminous flux≥2700LM Protection class: IP67/IP6K9K Certification: CE/RoHs/IP67 	/	Piece
★ALO-W-4.2-L8D1-A		4.2"	27W	3W	Flood	Rated voltage: DC12V/DC 24V Working voltage range: DC9-30V Luminous flux: ≥2200 lm Beam Pattern: Flood Protection class: IP67 Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:108*108mm Thickness:53mm Weight:368g 	/	Piece
★ALO-W-4.2-L8D1		4.25"	27W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥ 6200LM/720LX Protection class: IP67 Certification: CE/RoHs/IP67 	/	Piece
★ALO-W-4.29-L8D1		4.64"	27W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 10-30V DC Luminous flux≥5800LM Protection class: IP67/IP6K9K Certification: CE/RoHs/IP67 	/	Piece
★ALO-R-3.2-L4D1-4		3.2"	12W	3W	Flood	Rated voltage: DC 12V/DC 24V Working voltage range:DC 9-30V Beam Pattern: Flood Protection class: IIP67 Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:82*82mm Thickness:39mm Weight:70g 	/	Piece
★ALO-W-3.34-L15D1-9		3.34"	13.5W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥2600LM Protection class: IP67/IP6K9K Certification: CE/RoHs/IP67 	/	Piece

★ ALO-R-3.34-L16D1-9		3.34"	14W	2835	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥6200LM/720LX Protection class: IP67 Certification: CE/RoHs/IP67 	/	Piece
★ ALO-R-4.5-L20K3-14		4.5"	15W	2835	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥6200LM/720LX Protection class: IP67 Certification: CE/RoHs/IP67 	/	Piece
★ ALO-R-3.5-L10D1		3.5"	18W	3W	Flood	Rated voltage: DC 12V/DC 24V Working voltage range:DC 9-30V Beam Pattern: Flood Protection class: IIP67 Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:89*89mm Thickness:35mm Weight:100g 	/	Piece
★ ALO-R-4.5-L5D1-9		4.5"	15W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥ 6200LM/720LX Protection class: IP67 Certification: CE/RoHs/IP67 	/	Piece
★ ALO-R-4.5-L5T3		4.5"	27W	3W	Flood	Rated voltage: DC 12V/DC 24V Working voltage range:DC 9-30V Beam Pattern: Flood Protection class: IIP67 Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:115*115mm Thickness:58mm Weight:345g 	/	Piece
★ ALO-R-4.5-L5D1		4.5"	27W	3W	Flood	Rated voltage: 12V / 24V Working voltage range: 9-32V DC Luminous flux≥6200LM/720LX Protection class: IP67 Certification: CE/RoHs/IP67 	/	Piece
★ ALO-R-4.64-L5D1		4.64"	27W	3W	Flood	Rated voltage: DC 12V/DC 24V Working voltage range:DC 9-30V Protection class:IP67 Beam Pattern: Flood Vibration level: 10g/5-500Hz 30g/25-55HZ Product size:115*115*40mm Thickness:40mm Weight:195g 	/	Piece

Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
2" / 4" LED Round Light								
★ALO-R-2-P6T		2"	10W	10W	Spot	1.LED Chips: Osram 5W/10W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Connector Type: Waterproof DT Connector 5.Waterproof Rate: IP68 & IP69K 7. Bracket: Anti-Rust Iron 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add \$1 get small DTconnector or Standard wire harness option: For control 1 light: add \$6; For control 2 lights: add \$9.1	68x35x30cm 20kg 45 pcs per carton	Piece
ALO-R-4-C24D1		4"	30W	Osram 5W	Combo		68x29x28cm 13kg 20 pcs per carton	Piece
ALO-R-4-C24T3		4"	60W	Osram 10W	Combo			

4" LED Driving Light with RGB backlight












Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-R4T3-PQ		4"	40W	Osram 10W+RGB	Spot	1.LED Chips: Osram 10W+RGB 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Spot/Flood 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Anti-Rust Iron 9. 1) Wiring & Switch control. For control 1 light: add \$8.5 ; For control 2 lights: add \$13.9 2) Wireless bluetooth and App control. Add 6~8\$ to get wiring and 10.3~16.4\$ for Bluetooth box.	59x40x35cm 19.5kg 16 pcs per carton	Piece
★ALO-R4T3-EQ		4"	40W	Osram 10W+RGB	Flood	Flush Mount Optional (Add \$1.7/pc)  Flush Mount Optional	59x40x35cm 19.5kg 16 pcs per carton	Piece

4" 7" 9" LED Driving Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
★ALO-W-4-R12T3-AW (with white/amber backlights)		4"*3.8"	40W	Osram 10W	Combo	1. LED Chips: Osram 5W/6W/10W 2. Input Voltage : 9V-36V 3. Color Temperature: 6500K 4. Beam Pattern: Combo 5. Connector Type: Waterproof DT Connector 6. Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+		Piece
ALO-W-4-R12T3-AW-D2		11.5"*3.8"	80W	Osram 10W	Combo	11. Add 1-2S get small DT connector or \$6 get Standard wire harness; For control 2 lights: add \$9.1 ALO-R5H-CW, ALO-R7H-CW, ALO-R-7-P7E7DH Standard wire harness option: For control 1 light: add \$10.2 For control 2 lights: add \$11.5		Kit
ALO-W-4-R12T3-AW-D4		21.6"*3.8"	160W	Osram 10W	Combo	ALO-P-R-9-C31D1-AW, ALO-P-R-7-C34D1-AW, ALO-P-R-9-R11Y-AW Standard wire harness option: For control 1 light: add \$6.8 For control 2 lights: add \$12 ALO-W-4-R12T3-AW : Wire harness for control 2 lights: Add \$10.1 ALO-W-4-R12T3-AW-D2/D4/D6/D8/D10: with wiring harness include		Kit
ALO-W-4-R12T3-AW-D6		31.7"*3.8"	200W	Osram 10W	Combo			Kit
ALO-W-4-R12T3-AW-D8		41.8"*3.8"	320W	Osram 10W	Combo			Kit
★ALO-W-4-R12T3-AW-D10		51.9"*3.8"	400W	Osram 10W	Combo			Kit

ALO-R-5-C10D1		7"	105W	Osram 5W	Combo		62x35x28cm 13.6kg 4 pcs per carton	Piece
★ALO-R5H-CW (with white background light, high lux design)		7"	144W	Osram 6W	Combo		52x36x33 cm 11.5 kg 4 pcs per carton	Piece
★ALO-P-R-7-C34D1-AW (with white/amber backlights)		7"	120W	Osram 5W	Combo			Piece
ALO-DR7		9"	180W	Osram 5W	Combo		55x30x27cm 12kg 4 pcs per carton	Piece
ALO-R-7-P7E7DH (with background light)		9"	160W	Osram 5W	Combo		62x41x34cm 16.4kg 4 pcs per carton	Piece
★ALO-R7H-CW (with white background light, high lux design)		9"	198W	Osram 6W	Combo		62x41x34cm 14kg 4 pcs per carton	Piece
★ALO-GR7-R (with side shooter)		9"	205W	Osram 5W	Combo + Side Shooter		55x31x29cm 12.8kg 4 pcs per carton	Piece
★ALO-GR7-B (with side shooter)		9"	205W	Osram 5W	Combo + Side Shooter		55x31x29cm 12.8kg 4 pcs per carton	Piece



★ALO-P-R-9-C31D1-AW (with white/amber backlits)		9"	150W	Osram 5W	Combo			Piece
★ALO-P-R-9-R11Y-AW (with white/amber backlits)		9"	135W	Osram 5W	Combo			Piece



9" Laser LED Driving Light

ALO-CR7-B (with Laser LED)		9"	130W	Osram 3W	Combo + Laser	1. LED Chips: Osram 3W 2. Input Voltage : 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combo+ Laser 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Working Temperature: -40°C~145°C 9. Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 10. Average Lifespan: 50,000 hours+ 11. Add 2\$ get small DT connector add 10.2\$ to get wiring, For control 2 lights: add \$15.8	55x31x29cm 12.8kg 4 pcs per carton	Piece
-------------------------------	---	----	------	----------	------------------	--	--	-------


Jeep Headlight & Fog Light



Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
ALO-M-1 (Black/Silver face)		7"	H:40W L:20W 1350LM/1 770LM	CREE 5W/10W White	High/Low Beam	1. Beam: High/LowBeam 2.Color Temperature: 6000K 3. Connector Plug: H4/H13 4. Voltage: 9-36V 	62x40x34cm 13.5KG 10pcs per carton	Piece
ALO-M-1C (Black/Silver face with DRL, DOT)		7"	H:55W; L:50W/ DRL10W 3450LM/ 3360LM	ADR/ EMark/ DOT	High/Low Beam, DRL	1. White halo light as DRL 2. Voltage : 9-36V 	62x40x34cm 13.5KG 10pcs per carton	Piece


ALO-FC9-001		9"	H: 60W L: 30W; 6000LM /3000LM	DOT /EMARK	High/Low beam,DRL, Turning	9" fling Knife LED headlight for Jeep JL(Pair) 1.Color: Black and Chrome 2.IP Grade: IP67 3.Input voltage: 9-16v 4.Power: 30W@low beam 60W@High beam 5.Color Temp: 5700K 6.Life-span: Above 50000 hours 7.Lamp Cup Material: PMMA+PC	56*31*61cm 15kg /Carton 6pcs/Carton	Pair
ALO-DE7-001		7"	H: 60W L: 30W; 6000LM /3000LM	DOT /EMARK	High/Low beam,DRL, Turning ,White Ambient	60W 7" Dragon eyes for JEEP JK(Pair) 1.Color: Black and Chrome 2. IP Grade: IP67 3.Input voltage: 9-16v 4.Power: 30W@low beam 60W@High beam 5.Life-span: Above 50000 hours 6.Lamp Cup Material: PMMA+PC 7.Color Temp: 5700K	43*42*35cm 14kg /Carton 8pcs/Carton	Pair
ALO-KK7-001		7"	H: 60W L: 30W; 6000LM /3000LM	DOT /EMARK	High/Low beam, DRL	7" King Kong Headlight for 07-17 Wrangler(Pair) 1. IP Grade: IP67 2.Input voltage: 9-16v 3.Power: 30W@low beam/ 60W@High beam 4.Life-span: Above 50000 hours 5.Certification : DOT/EMARK 6.Lamp Cup Material: PMMA+PC 7.Color Temp: 5700K	43*42*35cm 14kg /Carton 8pcs/Carton	Pair
ALO-DYSF7-02		5"*7"	H: 60W L: 30W; 6000LM /3000LM	DOT	High/Low beam,DRL, Turning	5X7 LED Replacement for Sealed Beam with DRL For Truck (Pair) 1.Qty of LED: 6pcs 10W +2pcs 15W LED/lamp 2.LED Color: 6000K-6500K/White 3.Bezel Color: Black/silver 4.Voltage: DC 9V~32V	51*37*49cm 18.5kg /Carton 16pcs/Carton	Pair
ALO-DYSF7-03		5"*7"	H: 60W L: 30W; 6000LM /3000LM	DOT	High/Low beam,DRL, Turning	5X7 LED Replacement for Sealed Beam with DRL (Pair) 1.Qty of LED: 6pcs 10W +2pcs 15W LED/lamp 2.LED Color: 6000K-6500K/White 3.Bezel Color: Black/silver 4.Voltage: DC 9V~32V	51*37*49cm 18.5kg /Carton 16pcs/Carton	Pair
ALO-DYS-702		7"	55W	/	High/Low Beam	DOT APPROVED 7" SPIDER HEADLIGHT for 07-17 Jeep Wrangler (Pair) 1. Voltage: DC9-16V 2. High/Low beam: 3600LM/2400LM 3. Material:Die-cast aluminum 5.Life-span: Above 50000 hours 6.Color Temperature :5500-6500K 7.Waterproof Rate: IP67	43*42*35cm 14kg /Carton 8pcs/Carton	Pair
ALO-DOT7-002(SD)-Black		7"	45W	/	High/Low Beam, Halo light	DOT APPROVED 7" SPIDER HEADLIGHT (Pair) 1. Voltage: DC9-16V 2. High/Low beam: 3600LM/2400LM 3. Material:Die-cast aluminum 5.Life-span: Above 50000 hours 6.Color Temperature :5500-6500K 7.Waterproof Rate: IP67	43*42*35cm 14kg /Carton 8pcs/Carton	Pair
ALO-DOT7-002(SD)-Red		7"	45W	/	High/Low Beam, Halo light	DOT APPROVED 7" SPIDER HEADLIGHT (Pair) 1. Voltage: DC9-16V 2. High/Low beam: 3600LM/2400LM 3. Material:Die-cast aluminum 5.Life-span: Above 50000 hours 6.Color Temperature :5500-6500K 7.Waterproof Rate: IP67	43*42*35cm 14kg /Carton 8pcs/Carton	Pair
ALO-M-2		4"	6PCS@ 30W	CREE 5W White	Fog Light	1.Light Type: Fog Light 2.Input Voltage: 12VDC 3.Color Temperature: 6000K 	47x30x36.5cm 12.5KG 24pcs per carton	Piece
ALO-M-2B (with ring for DRL/Turn light)		4"	6PCS@ 30W	CREE 5W White/ Amber	Fog Light	Ring can be white/yellow, Work as DRL / Turn Light 	47x30x36.5cm 12.5KG 24pcs per carton	Piece

Single Pack Rock light


Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
★ALO-Y-D-2		2"	15W	Osram 5W	White	1. Single Colors and RGB color to choose from. 2, LED Chips: Osram/Cree 5W/3W 3. Waterproof: IP68& IP69K 4. DuPont painting, Aluminum housing 5.Operating temperature:-40°C~145 °C 6.Average Lifespan: 50,000 hours+	59x47x23cm 20kg 100pcs per carton	Piece
ALO-Y-2-R		2"	9W	CREE 3W	Red			
ALO-Y-2-G		2"	9W	CREE 3W	Green			
ALO-Y-2-L		2"	9W	CREE 3W	Blue			
ALO-Y-2-A		2"	9W	CREE 3W	Amber			
★ALO-Y1-2-RGB		2"	9W	CREE 3W	RGB			
★ALO-Y-2-H2		2"	15W	3570	White & Amber			

RGB Rock Light Kit

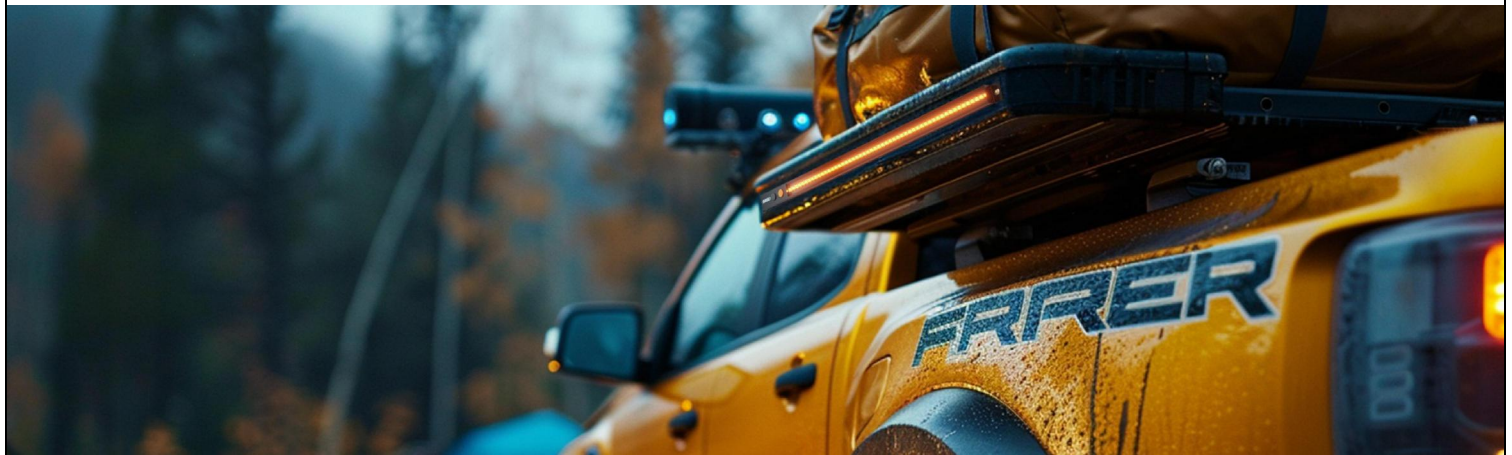



Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
ALO-Y1D-2-RGB-D4		2"	36W	RGB	/	1. 4pcs/6pcs/8pcs Kit to choose from. 2, LED Chips: Cree3W 3. Waterproof: IP68& IP69K 4. DuPont painting, Aluminum housing 5.Operating temperature:-40°C~145 °C 6. Average Lifespan: 50,000 hours+ 7. Wireless Control RGB Rock Light kit, change colors via mobile phone APP	52x40x25cm 11.2kg 5pcs per carton	Kit
★ALO-Y1D-2-RGB-D6		2"	54W	RGB	/		52x40x25cm 12kg 5pcs per carton	Kit
ALO-Y1D-2-RGB-D8		2"	72W	RGB	/		 47x30x32cm 12kg 4 pcs per carton	Kit

High Power RGBW LED Rock Light Kits

ALO-Y3-RGBW-2		2.4"*3.1"	96W	RGBW	/	1.2pcs/4pcs/6pcs/8pcs Kit to choose from. 2. LED Chips: 4w *12pcs 3. Waterproof: IP68& IP69K 4. DuPont painting, Aluminum housing 5. Operating temperature: -40°C~145 °C 6. Average Lifespan: 50,000 hours+ 7. Wireless Control RGB Rock Light kit, change colors via mobile phone APP		Kit
ALO-Y3-RGBW-4		2.4"*3.1"	192W	RGBW	/			Kit
ALO-Y3-RGBW-6		2.4"*3.1"	288W	RGBW	/			Kit
ALO-Y3-RGBW-8		2.4"*3.1"	384W	RGBW	/			Kit

Dimmable Camping Light



Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
★ ALO-CL-300		14.5"	6W	2835	White & Amber	1.LED Chips: 2835 2. Input Voltage: DC12V 3.Color Temperature: 5700K, 3000K 4.Beam Pattern: Combination 5.Waterproof Rate: IP68 & IP69K		Piece
★ ALO-CL-600		26.8"	9W	2835	White & Amber	6. Housing Material: Aluminum 6063 7. Bracket: Magnetic 8.Control Way: Button Control 9.Working Temperature: -40°C~145 °C		Piece
★ ALO-CL-900		39.8"	12W	2835	White & Amber	10. Average Lifespan: 50,000 hours+		Piece

Voice Control RGB Atmosphere Lamp



Model	Picture	Size	Watt	LED Chips	Beam	Specs	Carton Size & Weight	Unit
ALO-BT09-4		/	1~1.5W	high-quality lamp beads	RGB	1.Voltage: DC12V 2.Fantasy Colorful, 8 colors available 3.Sound Control: color change, brightness adjustable, turn on/off the light etc. 4.Easy and Non-destructive installation 5. Act as car interior light, tail light, rock light ,pickup light etc.	57x45x37cm 5.2kg 20pcs per carton	Kit




APP+Switch Control RGB Atmosphere Lamp

ALO-WG-00016		/	12~32W	5050 SMD	RGB	1. Output: DC 12V=2A 2. Voltage: 5V(USB) , 12V(Car Cigarette lighter) 3. Power: 12~32W 4. LED Chips: 5050 SMD 5. LED quantity: 12*4 6. Front seat cable length: 130cm/4.2ft *2 7. Rear seat cable length: 180cm/5.9ft *2 8. LED Light strip size: 22.5cm*1.3cm*0.5cm 9. Connectivity Technology: Bluetooth 10. Syncs with music rhythm 11. DIY modes and 16 million colors: white/red/blue/lemon yellow/orange/green/pink purple/ice blue 12. Intelligent APP control 13. 2-line design, easy installation	42.5x37x49cm 15kg 50pcs per carton	Kit
--------------	---	---	--------	----------	-----	---	--	-----

Marine Series LED Light




Model	Picture	Size	Watt	LED Chips	Beam Pattern	Specs	Carton Size & Weight	Unit
Marine Series LED Light								
ALO-M-Y-D-2		2"	15W	Osram 5W	White	1.LED Chips: Osram/Cree 5W/3W 2. Waterproof: IP68& IP69K 3. AkzoNobel Powdering, Aluminum housing 4. Stainless steel screws 5.Operating temperature: -40°C~145°C 6. Average Lifespan : 50,000 hours+	59x47x23cm 20kg 100 pcs per carton	Piece
ALO-M-Y-2-R			9W	CREE 3W	Red			
ALO-M-Y-2-G			9W	CREE 3W	Green			
ALO-M-Y-2-L			9W	CREE 3W	Blue			
ALO-M-Y-2-A			9W	CREE 3W	Amber			
ALO-M-L-2-E13T		2"	20W	Osram 10W	120°	1.LED Chips: Osram 10W 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: 120°/Flood/Combo 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material : Aluminum 6063 8. Bracket: Stainless steel screws and brackets 9.AkzoNobel Powdering: 360° Protection against UV, salt water,corrosion	59x40x35cm 17.7kg 45 pcs per carton	Piece
ALO-M-L-4-E13T		4"	40W	Osram 10W	120°	9.Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan : 50,000 hours+ 12. Add 1\$ get small DT connector or add 5\$ get Standard wire harness; ALO-M-W1-2-E4T, ALO-M-W-4-C27T3 : Standard wire harness option: For control 1 light: add \$6; For control 2 lights: add \$8	52*51*35cm 21kg 36 pcs per carton	Piece
ALO-M-W1-2-E4T		3"	40W	Osram 10W	Flood		69x30x16cm 11.5kg 10 pcs per carton	Piece
ALO-M-W-4-C27T3		4"	120W	Osram 10W	Combo		33*30*31cm 13.4KG 8 pcs per carton	Piece
ALO-M-R5H		7"	144W	Osram 6W	Combo		52x36x33 cm 11.5 kg 4 pcs per carton	Piece

ALO-M-R7H		9"	198W	Osram 6W	Spot	10.Working Temperature: -40°C~145°C 11.Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 12. Average Lifespan: 50,000 hours+ 13.Add 1-2\$ get small DT connector; Standard wire harness option: For control 1 light: add \$10.2; For control 2 lights: add \$11.5	62x41x34cm 14kg 4 pcs per carton	Piece
ALO-M-D6D1-10		10"	100W	Osram 5W	Combo	1.LED Chips: Osram 5W 2. Input Voltage: 9V-36V 3.Color Temperature: 6500K 4.Beam Pattern: Combo 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel screws and brackets 9.AkzoNobel Powdering: 360° Protection against UV, salt water,corrosion 9.Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Add 1~2\$ get small DT connector or add 6~8\$ get Standard wire harness	46x37x25cm 13.2kg 8 pcs per carton	Piece
ALO-M-C-D6D1-20		20"	200W	Osram 5W	Combo		62x29x30cm 14kg 6 pcs per carton	Piece
ALO-M-C-D6D1-30		30"	300W	Osram 5W	Combo		91x29x31cm 14.8kg 4 pcs per carton	
ALO-M-C-D6D1-40		40"	400W	Osram 5W	Combo		116x30x31cm 17.5kg 4 pcs per carton	
ALO-M-C-D6D1-50		50"	500W	Osram 5W	Combo		141x29x17cm 11kg 4 pcs per carton	
ALO-M-S5D1-10-H		10"	50W	Osram 5W	Combo	Curved Light Bar Series Dimensions 	41x38x39cm 15kg 16 pcs per carton	Piece
ALO-M-C-S5D1-20-P7E7-H		20"	100W	Osram 5W	Combo		67x29x21cm 9.6kg 6 pcs per carton	Piece
ALO-M-C-S5D1-30-P7E7-H		30"	150W				119x21x27cm 11kg 4 pcs per carton	
ALO-M-C-S5D1-40-P7E7-H		40"	200W				119x21x27cm 14kg 4 pcs per carton	
ALO-M-C-S5D1-50-P7E7-H		50"	250W				144x20x21cm 12.9kg 4 pcs per carton	

Bowfishing LED Light Bar

ALO-M-DY-D6BA-20		20"	White: 55W Yellow: 66W	2020	Scene	1.LED Chips: 2020 2. Input Voltage: DC12-24V 3.Color Temperature: White: 6000-6500K Yellow: 1700-1800K 4.Beam Pattern: Combination 5.Connector Type: Waterproof DT Connector 6.Waterproof Rate: IP68 & IP69K 7. Housing Material: Aluminum 6063 8. Bracket: Stainless steel screws and bracket 9.AkzoNobel Powdering: 360° Protection against UV, salt water,corrosion 10. Control Way: Wiring Rotating Button /Remote Control 9.Working Temperature: -40°C~145°C 10.Test and Certificate: CE, RoHS, UV, anti-vibration, anti-interference, salt spray, high and low temperature, falling ball impact, etc. 11. Average Lifespan: 50,000 hours+ 12. Including Wiring harness	63x35x26cm 16.6kg 6 pcs per carton	Piece
------------------	---	-----	---------------------------	------	-------	---	--	-------

Model	Picture	Specs	Unit
O Style Mounts Sound Damper			
ALO-AO100		1inch O style Mounts accessories, with Anti-UV painting, in Pair	Pair
ALO-AO175		1.75 inch O style Mounts, in pair	Pair
ALO-AO200		2 inch O style Mounts, in pair	Pair
ALO-AO250		2.5 inch O style Mounts, in pair	Pair
ALO-AO275		2.75inch O style Mounts, in pair	Pair
ALO-AO300		3 inch O style Mounts, in pair	Pair
Holder and Bracket			
ALO-AH39		Hook Bracket for D5 and Screwless Series dual row light bars(1pcs)	Piece
ALO-AH55		Slider Bracket for RGB Light Series Single Row Light	Piece
ALO-AH49		Hook Bracket for Screwless Series Singlerow light bars(1pcs)	Piece
ALO-AH5		Oblique pillars Bar Light Mount (1pcs) All size are available: 1", 1.25", 1.5", 1.75", 2", 2.25", 2.5", 2.75", 3", 3.25".	Piece
ALO-AH6		Horizontal Bar Light Mount (1pcs) All size are available: 1", 1.25", 1.5", 1.75", 2", 2.25", 2.5", 2.75", 3", 3.25".	Piece
ALO-AH7		Vertical Bar Light Mount (1pcs) All size are available: 1", 1.25", 1.5", 1.75", 2", 2.25", 2.5", 2.75", 3", 3.25".	Piece
ALO-AH41		Horizontal Bar Clamp Mounting Kit 0.75"/1"/1.25"	Pair
ALO-AH42		Horizontal Bar Clamp Mounting Kit 1"/ 1.5"/ 1.75"/ 2"	Pair
Sound Damper			
ALO-ANB1		Black Sound damper for Heavy Duty Series dual row light	Piece
ALO-ANW1		White Sound damper for Heavy Duty Series dual row light	Piece
Cover for Light			
ALO-AC10D6A		Amber lens cover for 10" Screwless dual row light	Piece
ALO-AC10D6H		Black lens cover for 10" Screwless dual row light	Piece
ALO-AC10SA		Amber lens cover for 10" single row	Piece
ALO-AC10SH		Black lens cover for 10" single row	Piece
ALO-AC2WA		Amber lens cover for W series work light	Piece
ALO-AC2WH		Black lens cover for W series work light	Piece
ALO-ACD3WC		Clear lens cover for D3 series work light	Piece
ALO-ACD3WA		Amber lens cover for D3 series work light	Piece
ALO-ACD3WH		Black lens cover for D3 series work light	Piece

ALO-AC4W		Black lens cover for 4" work light	Piece
ALO-AC4Y		Black lens cover for ALO-W-4-R12T3-AW	Piece
ALO-AC4R		Black lens cover for 4" driving light	Piece
ALO-AC5R		Black lens cover for 7" driving light	Piece
ALO-AC5RA		Amber lens cover for 7" driving light	Piece
ALO-AC7R		Black lens cover for 9" driving light	Piece
ALO-AC7RA		Amber lens cover for 9" driving light	Piece
ALO-AC9YC		Clear lens cover for ALO-P-R-9-R11Y-AW	Piece
ALO-AC9YA		Amber lens cover for ALO-P-R-9-R11Y-AW	Piece
ALO-AC9Y		Black lens cover for ALO-P-R-9-R11Y-AW	Piece
ALO-AC6LA		Amber lens cover for 6" quad light	Piece

Wire Harness and Switch

ALO-AW6		Splitter cable for 2 lights	Piece
ALO-AW7		Splitter cable for 4 lights	Piece
ALO-AW27		Wiring harness for 2" / 4" LED work light Include relay, switch, fuse and waterproof connector	Piece
ALO-AW21		Wiring harness for one pair of 2"x4"x6"x10" LED lights Include relay, switch, fuse and waterproof connector	Piece
ALO-AW103		Wiring harness for Double/Single row 4"x6"x10"x20". Include relay, switch, fuse and waterproof connector	Piece
ALO-AW26		Wiring harness for Double/Single row 30"x40"x50". Include relay, switch, fuse and waterproof connector	Piece
ALO-AK1		Two-position On/Off switch, with LED indicator light	Piece
ALO-AK2		Waterproof Two-position On/Off switch, with LED indicator light	Piece
ALO-AK22		Two-position Rock Switch with LED indicator light	Piece
ALO-ASS01		Safety set screw(1pcs key,2pcs screw nut)	Piece

Control Kit

★ ALO-BT07-8		9-Gang Control System Specification: 1.Input Voltage: 12V/24V DC 2. Number of Circuits and Relay: 9 3.Max Ampere and Power: Port 1: 22A, 290W / Port 2: 20A,264W/ Port 3-4 : 10A, 132W/ Port 5-8 : 5A, 53W Port 9-12 RGB Beam : 4A, 26W 4.Control Type: Bluetooth & APP Control / Panel Control 5. Control Box Dimension : 136.5x105.3x34.7mm	Set
--------------	---	--	-----

RGB Cable (Optional Parts of ALO-BT07-8)		cable for 1 RGB light	Piece
		Splitter cable for 2 RGB lights	
		Splitter cable for 4 RGB lights	
		Splitter cable for 6 RGB lights	
		Splitter cable for 8 RGB lights	
ALO-JC01 (6 switch)		Universal 6-Gang Touch Pad Control System Specification: 1. Input Voltage: 12V DC 2. Number of Circuits and Relay: 6 3. Max Power: 720W 4. Max Total Current: 60A 5. Max Current per Relay: 30A (equipped with 20A fuse) 6. Switch Type: Touch Pad On/Off, with blue back-light LED 7. Switch Panel Dimension: 95x65x10mm 8. Control Box Dimension : 159x89x83mm	Piece
ALO-JC02 (8 switch)		1. Input Voltage: 12V 24VDC 2. Number of Circuits and Relay: 8 3. Max Power: 600W-1200W 4. Max Total Current: 60A 5. Max Current per Relay: 30A (equipped with 20A fuse) 6. Switch Type: Touch Pad On/Off, with blue back-light LED 7. Switch Panel Dimension: 115*15*66mm 8. Control Box Dimension : 190*34*105mm	Piece
ALO-BT06-1		Bluetooth control box for controlling 1 light	Piece
ALO-BT06-2		Bluetooth control box for controlling 2 lights	Piece
ALO-BT06-4		Bluetooth control box for controlling 4 lights	Piece
ALO-BT06-6		Bluetooth control box for controlling 6 lights	Piece
ALO-BT06-8		Bluetooth control box for controlling 8 lights	Piece
Car Air Purifier Ionizer			
JO-6291		Car Air Purifier Ionizer Silver / Black / Gold	Piece